


# Nera WorldPhone – Brief Operating Instruction

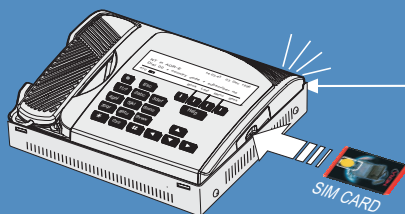

Power supply  
ON/OFF

Telephone unit  
ON/OFF

SIM CARD

## Switching ON

- 1 Insert SIM card (if SIM operated).
- 2 Switch ON power supply.
- 3 Press and hold telephone unit ON/OFF key for 2 secs.
- 4 Enter SIM/Phone PIN code:  
and press **Ok**:  
Adjust display brightness with arrow keys:

**Help**  
provides  
operating  
assistance

Main window

20 Mar 1997 15:20

Telenor in AOR-E  
Dial 00 + country code + subscriber no

470 DC SIM Book Last Menu Seek

Esc

1/? 2abc 3def Help

4ghi 5jkl 6mno

7pqr 8stu 9vwx

\* 0yz # ◀ ▶

WorldPhone

→ SIM PIN: \*\*\*\*\*

Press "Help" for an introduction.

470 DC ◀ Del Ok

## Satellite search

- 1 The WorldPhone starts searching for **any satellite**: **slow** intermittent beep tones sound (provided Tone is ON). Beeps are **rapid** when searching for a **specific satellite**.
- 2 When receiving an Inmarsat satellite signal, a short tone will sound, increasing in frequency when closing in. A signal strength bar and indication appear. (A readout above 400 should give a good signal.) Press **Ok**.  
*If low signal strength indication:*  
start search again: **Seek**  
or select satellite with better coverage: **New**
- 3 *Make sure that the Net provider is correct.*

Signal bar: low → high signal strength

Satellite search

Found AOR-E. Accept this satellite?

Volume

470 DC SIM Mute Seek New Ok

Signal strength indication

Press to turn search tone OFF/ON: Mute « Tone.

New search satellite

Found AOR-E.

ALL  
→ AOR-W  
AOR-E  
POR  
IOR

470 DC SIM Selct

Pressing Selct enters chosen satellite

## Making a call

- 1 Dial 00 followed by country code and subscriber number, e.g.: **00 47 67244700** (or, use short number).
- 2 Send the number: **Call**.
- 3 Lift handset and proceed with call.  
*Handsfree when handset is in place.*
- 4 To disconnect call, put down handset. *Press Clear when handsfree.*

0yz → Number: 004767244700

Net provider: Telenor  
Terrestrial network: 00

470 DC SIM ◀ Del Call Short

Calling 004767244700 via Telenor in AOR-E 00:07:34

Status : Connected  
Handset

Volume

470 DC SIM on Mute Menu Clear


Alt.: Handsfree, Loudspeaker

# Nera WorldPhone – Brief Operating Instruction

The WorldPhone provides communication with the public telephone network via **satellite**, which requires **free line of sight**.

Four satellites are positioned stationary above **equator**. The satellites provide the coverage shown on the map below.

The WorldPhone searches **any satellite** as default.



☐ WorldPhone coverage

